Specifications

ΔΡC



APC Smart-UPS On-Line SRT Battery Pack for 8/10kVA Extended runtime model 192V

SRT192BP2

Overview

Lead time

Usually in Stock

Main

Product or component type	Battery
Battery type	Lead-acid battery
provided equipment	Documentation CD Installation guide Warranty card
Range of product	Smart-UPS Battery Systems

Batteries & Runtime

Number of battery free slots	0
Number of battery filled slots	0
Device mounting	Stand alone battery stack
Battery voltage	+/- 192 V
Number of battery replacement quantity	2
Replacement battery	

Physical

-	
Colour	Black
Height	43.2 cm
Width	13 cm
Depth	68.27 cm
Net weight	91 kg
Mounting mode	Rack-mounted with kit

Environmental

ambient air temperature for operation	040 °C	
Operating altitude	010000 ft	
Relative humidity	095 % non-condensing	
Ambient air temperature for storage	-1545 °C	
Storage altitude	0.00000000015240.000000000 m	
Storage Relative Humidity	095 % non-condensing	

Price is "List Price" and may be subject to a trade discount - check with your local distributor or retailer for actual price.

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	42.000 cm
Package 1 Width	100.000 cm
Package 1 Length	60.000 cm
Package 1 Weight	101.500 kg


Contractual warranty

Warranty

2 years repair or replace

Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing "Use Better, Use Longer, Use Again" campaign to extend product lifetimes and recyclability.

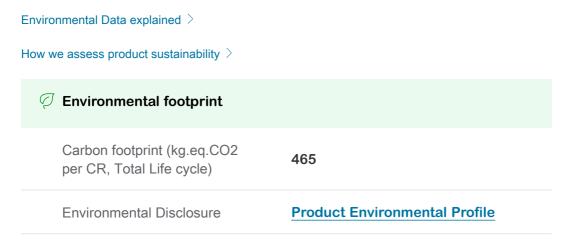

Use Better

S Materials and Substances	
Packaging made with recycled cardboard	Yes
Packaging without single use plastic	Νο
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope)
SCIP Number	488c31fb-3af8-42cf-9558-1362d000a07e
REACh Regulation	REACh Declaration

Use Again

○ Repack and remanufacture		
Circularity Profile	End of Life Information	
Removable battery	User replaceable	

Product datasheet

Image of product / Alternate images

Alternative



